



PRODUCT



MANUFACTURER

BEECH OVENS

MODEL NUMBER

TSQ0500 (*500 Series*) / TSQ0700 (*700 Series*)

PRODUCT DESCRIPTION

Square Tandoor – Charcoal, Gas or Electric

Ext Width:

Int Diameter:

Height:

850mm/1050mm.

500mm/700mm.


900mm.

MANUFACTURED IN AUSTRALIA

www.beechovens.com





SPECIFICATIONS

Purpose	Charcoal or Gas or Electric fired Tandoor oven for cooking Naan Bread and foods on skewers.
Construction	High grade castable ceramic inner surrounded by compacted insulation encased in 1.6mm 304 Stainless Steel outer casing. Insulated 5mm Stainless Steel base with high grade tile floor and refractory cast lower firing chamber. Fixed rear castors and lockable front swivel castors.
Firing Type	Charcoal or Gas or Electric (<i>combining firing types not available</i>).
Gas/Electric	Gas – 60mJ (56869 BTU) NAT / LPG (<i>Dual ring Cast iron Burner</i>). Electric – 11kW, 380V-450V 3 Phase (<i>Specify required voltage at order stage</i>).
Exhaust Requirements	Exhaust under Canopy/Exhaust Hood.
MEP Ratings	Gas Connection – 15mm (1/2") gas connection line. Electrical (<i>for Gas Fired</i>) – N/A. Electrical (<i>Electric Fired</i>) – 5 core supply cable to main control cabinet, no neutral. Thermocouple cable (<i>supplied</i>) to be connected in control cabinet upon connection.
Capacity	Internal surface area approx. 0.75m ² (<i>500 Series</i>) - 1.01m ² (<i>700 Series</i>). Capacity varies between Naan size and operator.
Accessories	SS Hook, Spade, Lid, Ash Scraper (<i>Charcoal</i>), 10 x SS Skewers, Analogue Thermometer. Optional Adjustable Feet to replace castors. Optional Saj/Roti Top Optional SS Skewer Ring around opening to position skewers Optional Skewer rack (<i>Freestanding or Wall mounted – holds approx. 10 skewers</i>) Optional 2 and 3 station common stone top supports (<i>stone by others – cut detail provided</i>)
Safety	Oven and associated systems are CE and UL certified and AS4563 compliant. UL Tested to Subject 2162 (<i>Charcoal/Gas Fired</i>). Complies to USA "ANSI-NSF standard 4" Exterior temperatures below 50°C. Compliant Gas systems with flame failure device.
Special Requirements	Should be installed under an approved exhaust system (Canopy or Hood) Floor surface and substrate to be constructed using non-combustible materials extending 800mm. Immediate surrounding area to be constructed using non-combustible materials.

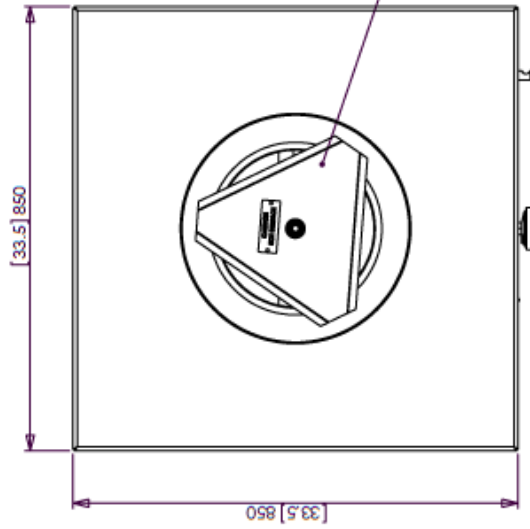


SERVICES REQUIRED

- GAS HEAT INPUT 60MJ (56000 BTU)
- 15mm (1/2") GAS LINE CONNECTION WITH ISOLATION VALVE
- EXHAUST DUCTING/CANOPY IN ACCORDANCE WITH LOCAL REGULATIONS

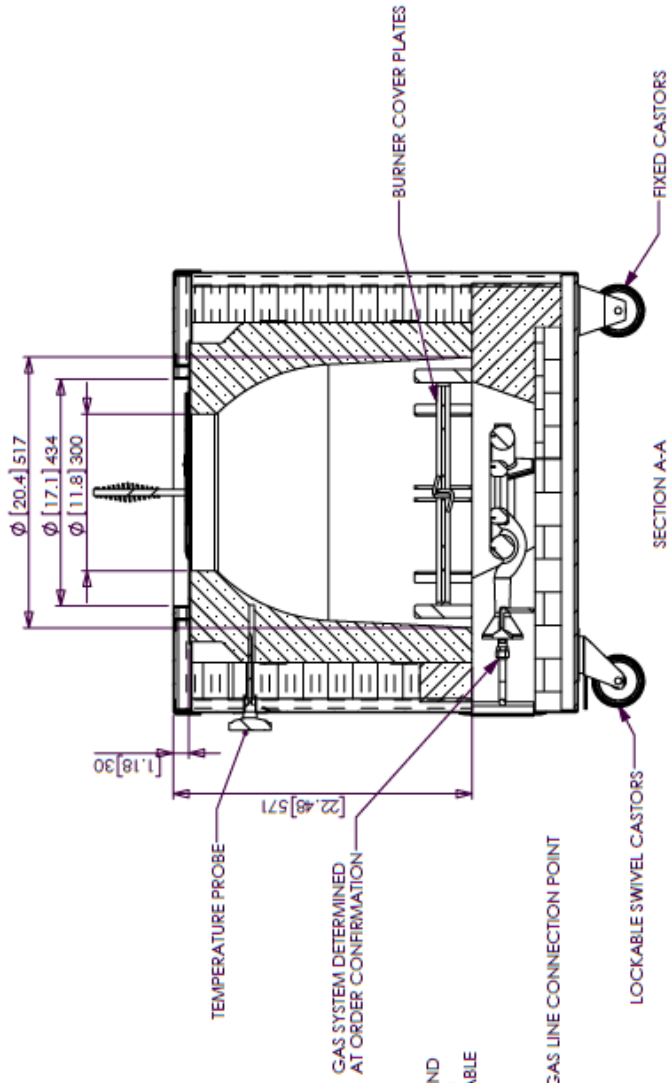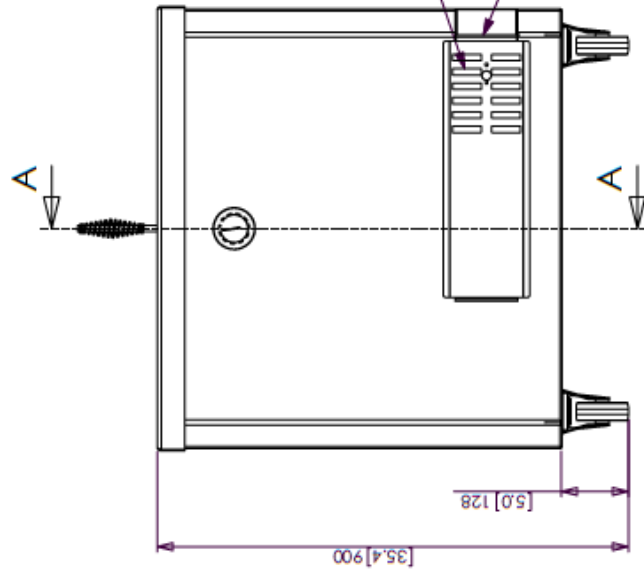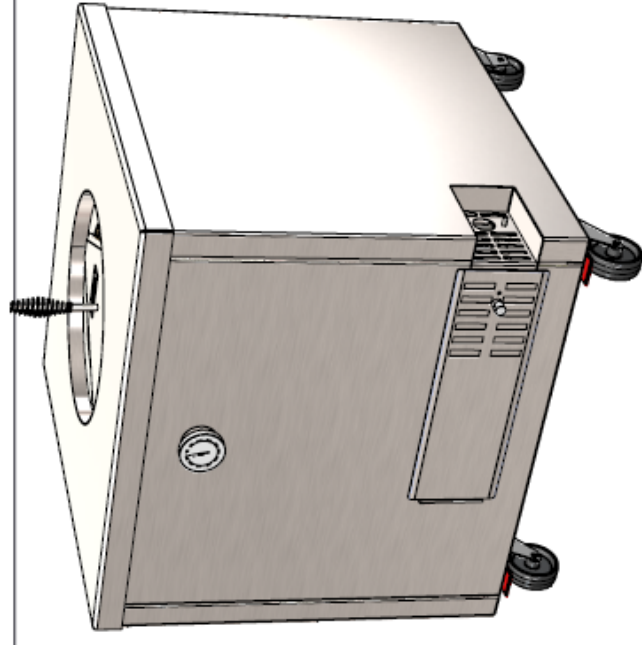


www.beechovens.com

TM		Drawn	S Trood	Checked	Scale	1:10	Date	10/01/2020
1		GENERAL DRAWING UPDATES						A3
0		ISSUED FOR CONSTRUCTION						NTS - SITE MEASURE
REV.		DESCRIPTION OF CHANGES						
LAST EDITED:		Friday, 10 January 2020 2:39:36 PM						
		©Copyright 2015 Beech Ovens Pty Ltd. All rights reserved.						
		TANDOR SQUARE Ø500mm INTERNAL STAINLESS STEEL FINISH STANDARD						
		TSQ0500-1000 - CASTORS (GAS)						


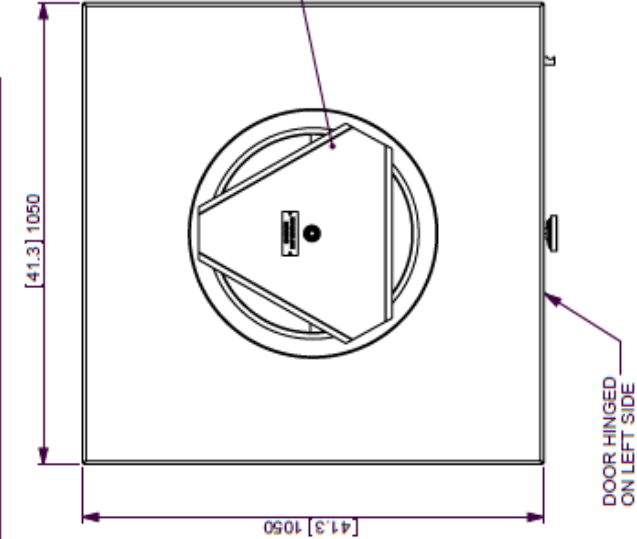


- SERVICES REQUIRED
- GAS HEAT INPUT 60MJ (56880 BTU)
 - 15mm (1/2") GAS LINE CONNECTION WITH ISOLATION VALVE
 - EXHAUST DUCTING/CANOPY IN ACCORDANCE WITH LOCAL REGULATIONS

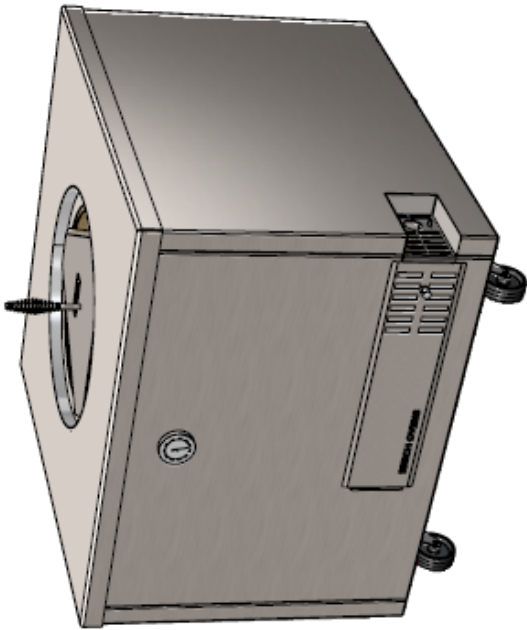


STAINLESS STEEL
REMOVABLE LID

DOOR HINGED
ON LEFT SIDE

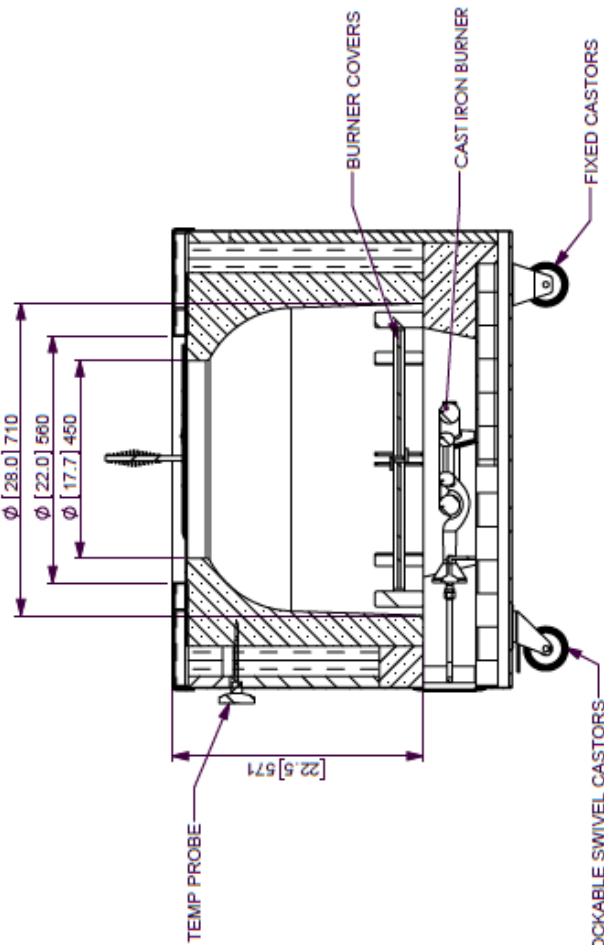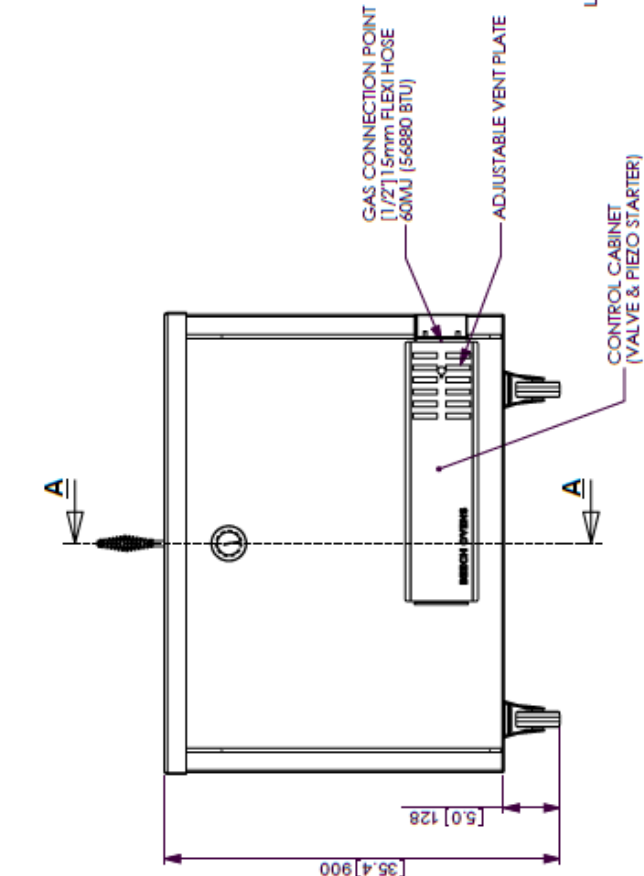

SECTION A-A



										TM	
1		REVISED WITH NEW BODY		14/10/2020		MCW					
0		ISSUED FOR CONSTRUCTION									
REV.		DESCRIPTION OF CHANGES		DATE		CHANGED BY					